

KSTAR

UPS Solution

Line Interactive UPS Series
(400~3000VA)



Company Profile

Founded in 1993, Shenzhen KSTAR Science and Technology Co., Ltd. (Stock code: 002518) is a global leader in the smart energy field. Kstar focused on the R&D and manufacturing of UPS, Precision Cooling and MDC (Modular Data Center), Battery, PV, ESS and EV Charger.



Founded in: 1993 **30+ years**
Listed in: 2010 **Stock Code:002518**



Key Products



UPS



Cooling & MDC



Battery



PV



ESS



EV Charger



Listed

Listed on SZSE



2

R&D Centers



8

Facilities



180+

180+ Markets



670+

R&D Employees



4300+

4300+ Employees

Market Achievement



**Global
UPS Supplier**

Data source: Omdia 2024



**China UPS Selling
Local Brands**

Data source: CCID Consulting
Annual Research Report on China's UPS
Product Market in 2023-2024



**China Single-rack Modular
Data Center Market Share**

Data source: ICT research
Annual Report on China's Modular Data
Center Product Market in 2023-2024



**China Lead-acid
Battery Market Share**

Data source: ICT research
Report on China's UPS Supporting Lead-Acid
Battery Product Market in 2023-2024

They Are Using Kstar



Beijing Olympic Games



Agricultural Bank of China Inner Mongolia Data Center



Shanghai Securities Waigaoqiao Earth Station



China's Leading Internet & E-commerce Giant A



Shanghai Telecom Data Center



Peking University Biomedical Imaging Technology Cluster Large Facility



Jinan Metro



Ruili to Menglian Expressway Electromechanical Project

Contents

1	Micropower Series (400~3000VA)	04
2	DG Series (600~3000VA)	06
3	AIO Series (600~1000VA)	08
4	Microsine Series (1000~2000VA)	10
5	VP68 RT Series (1~3kVA)	12
6	VP68 Li RT Series (1~3kVA)	14

Micropower Series



General Introduction

This UPS is specially designed for Personal Computer with multi-functions. Its light weight, compact design perfect fits to the limited working environment

The line of UPS is equipped with one boost and one buck AVR to stabilize input voltage range. It is also built-in with DC start function

This function enables the UPS to be started up without AC power supply. Although it's a small UPS, the main features of UPS are listed below

Features

- ◆ Line Interactive UPS with simulated sinewave output
- ◆ Excellent microprocessor control guarantees high reliability (Internal self-diagnostic technology)
- ◆ Boost and buck AVR for voltage stabilization (One boost and one buck control)
- ◆ Auto restart while AC is recovering
- ◆ Cold start function
- ◆ Off-mode charging
- ◆ Fast intelligent battery recharge function
- ◆ Offering LED and LCD panels for selections
- ◆ Optional Generator compatible
- ◆ Optional USB/RS232 communication port and RJ11/RJ45 protection



Two Kinds of Color LCD Display

LED Display



Optional Socket



Rear Panel

- ① AC Input; ② Output Socket; ③ USB & RJ11 Communication
④ USB & RS232 Communication; ⑤ RJ45

Technical Specifications

MODEL	Micropower 400	Micropower 600	Micropower 800	Micropower 1000	Micropower 1200	Micropower 1500	Micropower 2000	Micropower 2400	Micropower 3000	
Capacity (VAW)	400/240	600/360	800/480	1000/600	1200/720	1500/900	2000/1200	2400/1440	3000/1800	
INPUT										
Nominal Voltage (Vac)	110/120 or 220/230/240							220/230/240		
Operating Voltage Range (Vac)	81~145/162~290							162~290		
Operating Frequency Range (Hz)	60/50 (Auto sensing)									
OUTPUT										
AC Voltage Regulation (Batt. Mode)	±10%									
Frequency Range (Batt. Mode) (Hz)	60/50 ±1									
Transfer Time (ms)	Typical 2-6, 10 Max.									
Waveform (Batt. Mode)	Simulated Sinewave									
BATTERY										
Battery Voltage (Vdc)	12			24				48		
Battery Capacity (Ah)& Number (pcs)	4.5×1	7×1	9×1	7×2	7×2	9×2	9×2	7×4	9×4	
Typical Recharge Time (hours)	4~6 recover to 90% capacity			6~8 recover to 90% capacity						
MANAGEMENT										
LED Display	AC Mode, Battery Mode, Overload, Fault									
LCD Display	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage, Overload, Fault, and Battery Low									
Alarm	Battery mode, Battery low, overload, Battery replacement, Fault									
Communication Port	USB or RS232 (Supports Windows® 2000/2003/XP/Vista/2008, Windows® 7, Linux, Unix, and MAC)									
PROTECTION										
Full Protection	Short circuit, Overload, Overcharge and overdischarge protection									
ENVIRONMENTAL										
Humidity	0~90%RH @ 0~40°C (Non condensing)									
Noise Level (dB)	<45					<55				
PHYSICAL										
Dimension WxDxH (mm)	298×101×142			353×149×162		380×158×198		436×145×212		
Weight (kg)	3.8	4.3	4.9	7.8	8.4	10.1	10.5	20	23	
STANDARDS										
Safety	IEC/EN 62040-1; IEC/EN 60950-1									
EMC	IEC/EN 62040-2; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8									
Performance	IEC/EN 62040-3									

1. Specifications are subject to change without prior notice
2. Data above are typical values for reference only, not as a basis for engineering design



General Introduction

This UPS is specially designed for Personal Computer with multi-functions. Its light weight, compact design perfect fits to the limited working environment

The line of UPS is equipped with two boost and one buck AVR to stabilize wide input voltage range. It is also built-in with DC start function

This function enables the UPS to be started up without AC power supply. Although it's a small UPS, The main features of UPS are listed below

Features

- ◆ Line Interactive UPS with simulated sinewave output
- ◆ Excellent microprocessor control guarantees high reliability (Internal self-diagnostic technology)
- ◆ Boost and buck AVR for voltage stabilization (Wide input range with two boost and one buck control)
- ◆ Auto restart while AC is recovering
- ◆ Cold start function
- ◆ Off-mode charging
- ◆ Fast intelligent battery recharge function
- ◆ Generator compatible
- ◆ Offering LED and LCD panels for selections
- ◆ Optional USB/RS232 communication port and RJ11/RJ45 protection



Two Kinds of Color LCD Display

LED Display



Optional Socket



Rear Panel

- ① AC Input; ② Output Socket; ③ USB & RJ11 Communication
- ④ USB & RS232 Communication; ⑤ RJ45

Technical Specifications

MODEL	DG 600	DG 800	DG 1000	DG 1200	DG 1500	DG 2000	DG 2400	DG 3000
Capacity (VAW)	600/360	800/480	1000/600	1200/720	1500/900	2000/1200	2400/1440	3000/1800
INPUT								
Nominal Voltage (Vac)	230							
Operating Voltage Range (Vac)	140~300							
Operating Frequency Range (Hz)	50/60 (Auto sensing)							
OUTPUT								
AC Voltage Regulation (Batt. Mode)	±10%							
Frequency Range (Batt. Mode) (Hz)	50/60 ±1							
Transfer Time (ms)	Typical 4-8, 13 Max.							
Waveform (Batt. Mode)	Simulated Sinewave							
BATTERY								
Battery Voltage (Vdc)	12		24				48	
Battery Capacity (Ah)& Number (pcs)	7×1	9×1	7×2	7×2	9×2	9×2	7×4	9×4
Typical Recharge Time (hours)	4~6 recover to 90% capacity			6~8 recover to 90% capacity				
MANAGEMENT								
LED Display	AC Mode, Battery Mode, Overload, Fault						N/A	
LCD Display	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage, Overload, Fault, and Battery Low							
Alarm	Battery mode, Battery low, overload, Battery replacement, Fault							
Communication Port	USB or RS232(Supports Windows® 2000/2003/XP/Vista/2008, Windows® 7, Linux, Unix, and MAC)							
PROTECTION								
Full Protection	Short circuit, Overload , Overcharge and overdischarge protection							
ENVIRONMENTAL								
Humidity	0~90%RH @ 0~40°C (Non condensing)							
Noise Level (dB)	<45				<55			
PHYSICAL								
Dimension WxDxH (mm)	298×101×142		353×149×162		380×158×198		436×145×212	
Weight (kg)	4.3	4.9	7.8	8.4	10.1	10.5	20	23

1. Specifications are subject to change without prior notice

2. Data above are typical values for reference only, not as a basis for engineering design



General Introduction

The AIO All-in-One UPS series, featured with smart microprocessor control design, AVR boost and buck, Smart USB communication interface and cold start function, is an idea solution for protecting household and small office systems. In addition, the UPS is built-in USB charger, which can charge your mobile, PAD, etc.



Two Kinds of Color LCD Display

LED Display

Features

- ◆ Boost and Buck AVR corrects either under-voltage or over-voltage condition to minimize the usage of battery energy, hence to extend the life of battery
- ◆ Built-in USB charger supplies feasible access to recharge your mobile or PAD alone
- ◆ With ergonomic cable management design, all the access of the cable is from top only
- ◆ Cold Start Function
- ◆ Smart USB Interface for Power management supports real-time power and UPS status monitoring. Automatic shutdown, schedule and many other advance power management functions
- ◆ Auto-restart function enables the UPS may be automatically re-started when Utility recovers



Optional Socket



Rear Panel

- ① AC Input
- ② Output Socket
- ③ USB Communication
- ④ USB Charger

Technical Specifications

MODEL	AIO 600	AIO 800	AIO 1000
Capacity (VAW)	600/360	800/480	1000/600
INPUT			
Nominal Voltage (Vac)	220/230/240		
Operating Voltage Range (Vac)	162~290		
Operating Frequency Range (Hz)	50/60 (1±10%) auto-sensing		
OUTPUT			
AC Voltage Regulation (Batt. Mode)	±10%		
Frequency Range (Batt. Mode) (Hz)	50/60 ±1		
Transfer Time (ms)	Typical 2-6, 10 Max.		
Waveform (Batt. Mode)	Simulated Sinewave		
BATTERY			
Battery Voltage (Vdc)	12		
Battery Capacity (Ah)& Number (pcs)	7×1	9×1	9×1
Typical Recharge Time (hours)	6~8 recover to 90% capacity		
MANAGEMENT			
LED Display	AC Mode, Battery Mode, Overload, Fault		
LCD Display	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage, Overload, Fault, and Battery Low		
Alarm	Battery mode, Battery low, overload, Battery replacement, Fault		
Communication Port	USB or RS232(Supports Windows® 2000/2003/XP/Vista/2008, Windows® 7, Linux, Unix, and MAC)		
USB Charger Port	5Vdc/1A or 5Vdc/2A type A (For mobile or iPad charging)		
PROTECTION			
Full Protection	Short circuit, Overload , Overcharge and overdischarge protection		
ENVIRONMENTAL			
Humidity	0~90%RH @ 0~40°C (Non condensing)		
Noise Level (dB)	<45		
PHYSICAL			
Dimension WxDxH (mm)	293×202×93		309×202×93
Weight (kg)	3.6	4.9	6.4
STANDARDS			
Safety	IEC/EN 62040-1; IEC/EN 60950-1		
EMC	IEC/EN 62040-2; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8		
Performance	IEC/EN 62040-3		

1. Specifications are subject to change without prior notice
2. Data above are typical values for reference only, not as a basis for engineering design

Microsine Series



General Introduction

Microsine Series are Line Interactive UPS, with pure sinewave output waveform in Batt. Mode, and they offers perfect power protection for sensitive equipment. All models provide comprehensive LCD display for users to monitor the power status. With powerful protection, it prevents your data loss from power failure, surge, and sags.



Two Kinds of Color LCD Display



Optional Socket

Features

- ◆ Line Interactive UPS with true sinewave output
- ◆ Excellent microprocessor control guarantees high reliability (Internal self-diagnostic technology)
- ◆ Boost and buck AVR for voltage stabilization (One boost and one buck control)
- ◆ Auto restart while AC is recovering
- ◆ Cold start function
- ◆ Off-mode charging
- ◆ Fast intelligent battery recharge function
- ◆ Optional Generator compatible
- ◆ Optional USB/RS232 communication port and RJ45 protection



Rear Panel

- ① AC Input
- ② Output Socket
- ③ USB & RS232 Communication
- ④ RJ45

Technical Specifications

MODEL	Microsine 1000	Microsine 1500	Microsine 2000
Capacity (VA/W)	1000/700	1500/1050	2000/1400
INPUT			
Nominal Voltage (Vac)	220/230/240		
Operating Voltage Range (Vac)	162~290		
Operating Frequency Range (Hz)	50/60 (Auto sensing)		
OUTPUT			
AC Voltage Regulation (Batt. Mode)	±10%		
Frequency Range (Batt. Mode) (Hz)	50/60 ±1		
Transfer Time (ms)	Typical 2-6, 10 Max.		
Waveform (Batt. Mode)	Pure Sinewave		
BATTERY			
Battery Voltage (Vdc)	24		
Battery Capacity (Ah)& Number (pcs)	7×2	9×2	9×2
Typical Recharge Time (hours)	6~8 recover to 90% capacity		
MANAGEMENT			
LED Display			
LCD Display	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage, Overload, Fault, and Battery Low		
Alarm	Battery mode, Battery low, overload, Battery replacement, Fault		
Communication Port	USB or RS232(Supports Windows® 2000/2003/XP/Vista/2008, Windows® 7, Linux, Unix, and MAC)		
USB Charger Port			
PROTECTION			
Full Protection	Short circuit, Overload, Overcharge and overdischarge protection		
ENVIRONMENTAL			
Humidity	0~90%RH @ 0~40°C (Non condensing)		
Noise Level (dB)	<45		<55
PHYSICAL			
Dimension WxDxH (mm)	353×149×162	380×158×198	
Weight (kg)	8.6	11.5	12.3
STANDARDS			
Safety	IEC/EN 62040-1; IEC/EN 60950-1		
EMC	IEC/EN 62040-2; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8		
Performance	IEC/EN 62040-3		

1. Specifications are subject to change without prior notice
2. Data above are typical values for reference only, not as a basis for engineering design

VP68 RT Series



2 Kinds of LCD Can be selected



Cost-effective Green LCD



Advanced Touch Screen

Features


- ◆ Rack/Tower convertible design
- ◆ Wide input voltage range: 75~151Vac
- ◆ Selectable output voltage: 100/110/115/120/125Vac
- ◆ Smart charger design for optimized battery performance
- ◆ Emergency power off function (EPO)
- ◆ Generator compatible
- ◆ Hot-Swappable battery design
- ◆ Cold start
- ◆ Intelligent fan speed regulation
- ◆ Programmable receptacles optional
- ◆ Versatile LCD human-computer interface, 3.5 inch touch screen optional
- ◆ Multiple communication interface: RS232 (USB/EPO/Dry contact card/SNMP card optional)
- ◆ Multiple protection function: short-circuit, overload, over-heat, battery overcharge and over discharge, output low voltage and fan fault alarm
- ◆ Multiple groups of external battery boxes can be connected, providing diverse battery configuration options
- ◆ High operating efficiency, battery mode efficiency up to 92%, mains mode efficiency up to 98.5%
- ◆ Pass the safety certification standard UL1778
- ◆ The EMC meets FCC Part 15 Class B standards



Multifunctional bracket




The LCD panel can be rotated (Touch screen is gravity sensing)

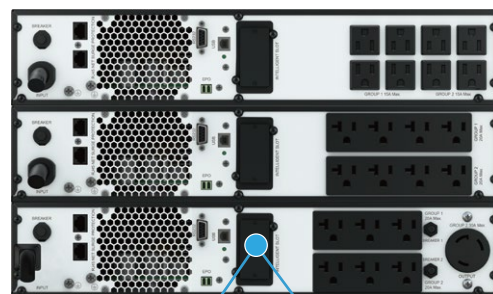

For 1&1.5k

For 2k

For 3k



SNMP card



Dry contact card

Technical Specifications

MODEL	VP68 RT 1k	VP68 RT 1.5k	VP68 RT 2k	VP68 RT 3k
Capacity (VAW)	1000/900	1500/1350	2000/1800	3000/2700
INPUT				
Nominal Voltage (Vac)	100/110/115/120/125			
Operating Voltage Range (Vac)	75~151			
Power Factor	≥0.99			
Bypass Frequency Range (Hz)	50~60			
OUTPUT				
Nominal Voltage (Vac)	100/110/115/120/125			
Voltage Regulation	±1%			
Power Factor	0.9			
Output Frequency(Hz)	50~60			
Crest Factor	3:1			
Harmonic Distortion (THDv)	≤2% Linear load; ≤5% Non-linear load			
Transfer Time (ms)	4~6 (10 max)			
Waveform	Sinewave			
EFFICIENCY				
AC Mode	Up to 98.5%	Up to 98.5%	Up to 98%	Up to 98%
Battery Mode	Up to 89.5%	Up to 91.0%	Up to 91.0%	Up to 92.0%
BATTERY				
Battery Type	Lead acid			
Battery Voltage (Vdc)	24	48	72	72
Battery Capacity (Ah)	7/9			
Charging Current (Max.)(A)	1.2/2.5			
MANAGEMENT				
LED/LCD Display	Line mode, Bat.mode, Battery low voltage, Overload & UPS fault			
ENVIRONMENTAL				
Operating Temperature (°C)	0~40			
Storage Temperature (°C)	-15~50			
Humidity Range	0~90%RH @ 0~40°C (Non condensing)			
Altitude (m)	<1000, derating required between 1000 to 3000			
Noise Level (dB)	<45			
PHYSICAL				
Dimension WxDxH (mm)	440×460×86.5	440×500×86.5	440×600×86.5	440×640×86.5
Weight (kg)	16.1	22.8	32.5	34.6
STANDARDS				
Safety	UL1778 5th Edition CSA C22.2 NO.107.3-14			
EMC	FCC Part 15, Subpart B, ClassB ANSI C63.4-2014			

1. Specifications are subject to change without prior notice
2. Data above are typical values for reference only, not as a basis for engineering design

VP68 Li RT Series



2 Kinds of LCD can be selected



Cost-effective
Green LCD



Advanced
Touch Screen

Features



- ◆ Rack/Tower convertible design
- ◆ Built-in lithium battery with more than 2000 times cycle life
- ◆ Reliable BMS protection
- ◆ Wide input voltage range: 75~151Vac
- ◆ Selectable output voltage: 100/110/115/120/125Vac
- ◆ Smart charger design for optimized battery performance
- ◆ Emergency power off function (EPO)
- ◆ Generator compatible
- ◆ Hot-Swappable battery design
- ◆ Cold start
- ◆ Intelligent fan speed regulation
- ◆ Programmable receptacles optional
- ◆ Versatile LCD human-computer interface, 3.5 inch touch screen optional
- ◆ Multiple communication interface: RS232 (USB/EPO/Dry contact card/SNMP card optional)
- ◆ Multiple protection function: short-circuit, overload, overheat, battery overcharge and over discharge, output low voltage and fan fault alarm
- ◆ Internal batteries offer industry-leading runtime (Up to 9 minutes at full load) to protect critical equipment during an unexpected power loss
- ◆ Lithium-ion batteries can pack more power into smaller spaces
Recharge to 90% capacity in 3 hours or less
- ◆ Lithium-ion technology delivers on average twice the life expectancy of traditional VRLA batteries
- ◆ Extend runtime when on battery power by power-cycling connected equipment and shedding less-critical loads
- ◆ High operating efficiency, battery mode efficiency up to 92%, mains mode efficiency up to 98.5%
- ◆ Pass the safety certification standard UL1778
- ◆ The EMC meets FCC Part 15 Class B standards
- ◆ UL 1642 (Cell)/UL1973 (Pack)/UN 38.3 (Transportation) certificate



Multifunctional
bracket



The LCD panel can be rotated
(Touch screen is gravity sensing)

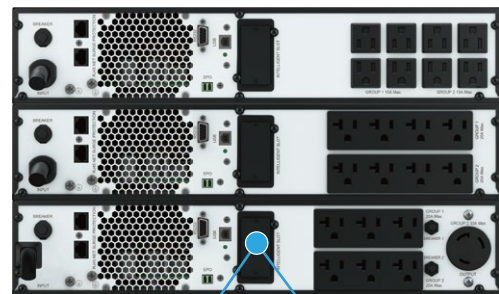

SNMP card



Dry contact card

Technical Specifications

MODEL	VP68 Li RT 1k	VP68 Li RT 1.5k	VP68 Li RT 2k	VP68 Li RT 3k
Capacity (VAW)	1000/900	1500/1350	2000/1800	3000/2700
INPUT				
Nominal Voltage (Vac)	100/110/115/120/125			
Operating Voltage Range (Vac)	75~151			
Power Factor	≥0.99			
Bypass Frequency Range (Hz)	50~60			
OUTPUT				
Nominal Voltage (Vac)	100/110/115/120/125			
Voltage Regulation	±1%			
Power Factor	0.9			
Output Frequency (Hz)	50~60			
Crest Factor	3:1			
Harmonic Distortion (THDv)	≤2% Linear load; ≤5% Non-linear load			
Transfer Time (ms)	4~6 (10 max)			
Waveform	Sinewave			
EFFICIENCY				
AC Mode	Up to 98.5%	Up to 98.5%	Up to 98%	Up to 98%
Battery Mode	Up to 89.5%	Up to 91.0%	Up to 91.0%	Up to 92.0%
BATTERY				
Battery Type	LiFePO ₄			
Battery Voltage (Vdc)	25.6	48	76.8	76.8
Battery Capacity (Ah)	9	6	6	9
Charging Current (Max.) (A)	2.5			
MANAGEMENT				
LED/LCD Display	Line mode, Bat.mode, Battery low voltage, Overload & UPS fault			
ENVIRONMENTAL				
Operating Temperature (°C)	0~40			
Storage Temperature (°C)	-15~50			
Humidity Range	0~90%RH @ 0~40°C (Non condensing)			
Altitude (m)	<1000, derating required between 1000 to 3000			
Noise Level (dB)	<45		<50	
PHYSICAL				
Dimension WxDxH (mm)	440×460×86.5	440×460×86.5	440×600×86.5	440×640×86.5
Weight (kg)	13.6	15.3	22.5	27.9
STANDARDS				
Safety	UL1778 5th Edition CSA C22.2 NO.107.3-14			
EMC	FCC Part 15, Subpart B, ClassB ANSI C63.4-2014			

1. Specifications are subject to change without prior notice

2. Data above are typical values for reference only, not as a basis for engineering design

Our Solution

UPS Solution Transformer-less Memopower Series

1~40kVA



UPS Solution Transformer-less HPM3300E Series

30~1200kVA



UPS Solution Robust Transformer-based UPS Series

1~800kVA



Precision Cooling Series

5~300kW



Data Center Integrated Solution

IDU/IDM/IDB/IOU Series



Lead-acid Battery Series

3.5~250Ah (12V)
200~3000Ah (2V)



UPS Solution Line Interactive UPS Series

0.4~3kVA



UPS Solution Transformer-less YDC3300 Series

10~200kVA



UPS Solution Transformer-less UL Products Series

1~100kVA



KSTAR



Website: www.kstar.com



Fax: +86-755-86168482



Tel: +86-755-86169858



E-mail: sales@kstar.com

HEADQUARTERS

Add: 4 / F, No.1 Bldg. Software Park, Keji C. Rd. 2nd, Hi-Tech Industrial Zone, Shenzhen 518057, P.R.China

FACTORIES ADDRESS

Add: Kstar Industrial Park, Guangming High-tech Zone, Shenzhen

Add: Kstar Industrial Park, Zhongkai High-tech Zone, Huizhou, Guangdong

Add: Kstar Industrial Park, Fuyuan Industrial Zone, Guanlan, Shenzhen

Add: CATL-KSTAR Science and Technology Co., Ltd.

Add: Jiangxi Changxin Golden Sunshine Power Co., Ltd.

Add: Jiangsu Kstar Energy Technology Co., Ltd.

Add: KSTAR (Vietnam) Co., Ltd.